


DIN 2215, ISO 4184

Objednáací číslo / Part.No.

13 x 940Li/970Lw AX37

13 ... Profil / profile

940Li ... Vnitřní délka / Inside length

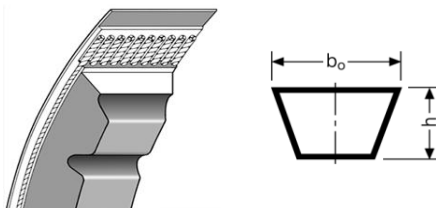

AX/13

$b_0 = 13 \text{ mm}$

$h = 8 \text{ mm}$



Continental
CONTITECH

Typ CONTI-V® FO / ROFLEX RE-X - Profil AX/13 - DIN2215

Typ řemenu / Part.No.				Typ řemenu / Part.No.				Typ řemenu / Part.No.					
Délka Li [mm]		Lw [mm]		Délka Li [mm]		Lw [mm]		Délka Li [mm]		Lw [mm]			
Length Li [mm]		Lw [mm]		Length Li [mm]		Lw [mm]		Length Li [mm]		Lw [mm]			
AX / 13				AX / 13				AX / 13					
AX 19	483	513	-	AX 58	1473	1503	-	AX 108	2743	2773	-		
AX 20	508	538	-	AX 59	1499	1529	-	AX 110	2794	2824	-		
AX 21	533	563	-	AX 60	1524	1554	-	AX 112	2845	2875	-		
AX 22	559	589	-	AX 61	1549	1579	-	AX 113	2870	2900	-		
AX 23	584	614	-	AX 62	1575	1605	-	AX 114	2896	2926	-		
AX 24	610	640	-	AX 63	1600	1630	-	AX 115	2921	2951	-		
AX 25	635	665	-	AX 64	1626	1656	-	AX 116	2946	2976	-		
AX 26	660	690	-	AX 65	1651	1681	-	AX 118	2997	3027	-		
AX 27	686	716	-	AX 66	1676	1706	-	AX 120	3040	3070	-		
AX 28	711	741	-	AX 67	1702	1732	-	AX 124	3150	3180	-		
AX 29	737	767	-	AX 68	1727	1757	-	AX 126	3200	3230	-		
AX 30	762	792	-	AX 69	1753	1783	-	AX 128	3251	3281	-		
AX 31	787	817	-	AX 70	1778	1808	-	AX 130	3302	3332	-		
AX 31,5	800	830	-	AX 71	1803	1833	-	AX 132	3353	3383	-		
AX 32	813	843	-	AX 72	1829	1859	-	AX 133	3378	3408	-		
AX 32,5	826	856	-	AX 73	1854	1884	-	AX 134	3404	3434	-		
AX 33	838	868	-	AX 74	1880	1910	-	AX 135	3429	3459	-		
AX 34	864	894	-	AX 75	1905	1935	-	AX 136	3454	3484	-		
AX 34,5	876	906	-	AX 76	1930	1960	-	AX 138	3505	3535	-		
AX 35	889	919	-	AX 77	1956	1986	-	AX 140	3556	3586	-		
AX 36	914	944	-	AX 78	1981	2011	-	AX 144	3658	3688	-		
AX 37	940	970	-	AX 79	2007	2037	-	AX 148	3759	3789	-		
AX 37.5	953	983	-	AX 80	2032	2062	-	AX 158	3993	4023	-		
AX 38	965	995	-	AX 81	2057	2087	-	AX 162	4115	4145	-		
AX 38,5	978	1008	-	AX 82	2083	2113	-	Lw max. AX/13 = 5000 mm Li = Ld - 30 mm La = Ld + 20 mm La = Li + 50 mm Hmotnost řemenu / Belt weight = 0,006 kg/m Min. průměr řemenice 63mm Min. pulley diameter 63mm Tučně označené rozměry jsou standardní. Bolt-typed belt sizes are standard. Další nestandardní rozměry na poptávku./ Other non-standard dimensions on demand. Lw = účinná délka / pitch length Li = vnitřní délka / inside length La = vnější délka / outside length					
AX 39	991	1021	-	AX 83	2108	2138	-						
AX 40	1016	1046	-	AX 84	2134	2164	-						
AX 41	1041	1071	-	AX 85	2159	2189	-						
AX 42	1067	1097	-	AX 86	2184	2214	-						
AX 42,5	1080	1110	-	AX 88	2235	2265	-						
AX 43	1092	1122	-	AX 89	2261	2291	-						
AX 43,5	1105	1135	-	AX 90	2286	2316	-						
AX 44	1118	1148	-	AX 91	2311	2341	-						
AX 44,5	1130	1160	-	AX 92	2337	2367	-						
AX 45	1143	1173	-	AX 93	2362	2392	-						
AX 45,5	1155	1185	-	AX 94	2388	2418	-						
AX 46	1168	1198	-	AX 95	2413	2443	-						
AX 47	1194	1224	-	AX 96	2438	2468	-						
AX 48	1219	1249	-	AX 97	2464	2494	-						
AX 49	1245	1275	-	AX 98	2489	2519	-						
AX 50	1270	1300	-	AX 99	2515	2545	-						
AX 51	1295	1325	-	AX 100	2540	2570	-						
AX 52	1321	1351	-	AX 102	2591	2621	-						
AX 53	1346	1376	-	AX 103	2616	2646	-						
AX 54	1372	1402	-	AX 104	2642	2672	-						
AX 55	1397	1427	-	AX 105	2667	2697	-						
AX 56	1422	1452	-	AX 106	2692	2722	-						
AX 57	1448	1478	-	AX 107	2718	2748	-						

!! Řemeny AX/13 lze nahradit výkonnějšími řemeny XPA / AX/13 V-belts can be replaced by raw-edged XPA !!