




Ozubené řemenice STD s válcovou dírou (bez díry)

Pilot Bore STD Timing Pulleys


S14M

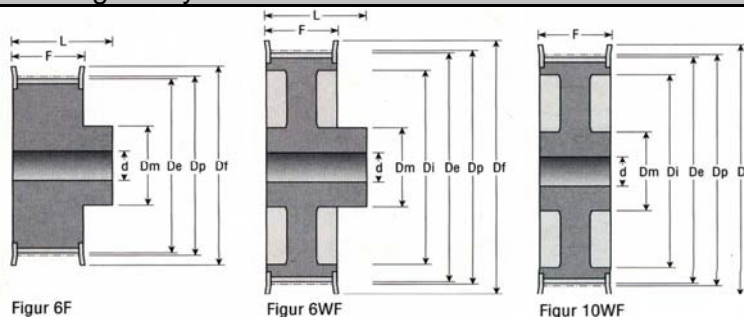

Typ S14M - Pro řemeny STD S14M - rozteč 14,0mm / For belts STD S14M - Pitch 14,0mm

Zubů Teeth	Šír.f. Width	Označení / Obj.č. Part.No.	Typ Fig.	* Mat. Mat.	Dp [mm]	De [mm]	Df [mm]	Dm [mm]	Di [mm]	F [mm]	S [mm]	d [mm]	m [kg]
28	40	28-S14M-40	6F	GG	124,78	122,12	127,00	100,00	-	54,0	69,0	-	4,73
	55	28-S14M-55	6F	GG	124,78	122,12	127,00	100,00	-	70,0	85,0	-	5,60
	85	28-S14M-85	6F	GG	124,78	122,12	127,00	100,00	-	102,0	117,0	-	7,70
	115	28-S14M-115	6F	GG	124,78	122,12	127,00	100,00	-	133,0	148,0	-	9,20
	170	28-S14M-170	6F	GG	124,78	122,12	127,00	100,00	-	187,0	202,0	-	13,80
29	40	29-S14M-40	6F	GG	129,23	126,57	138,00	100,00	-	54,0	69,0	-	5,09
	55	29-S14M-55	6F	GG	129,23	126,57	138,00	100,00	-	70,0	85,0	-	6,10
	85	29-S14M-85	6F	GG	129,23	126,57	138,00	100,00	-	102,0	117,0	-	8,40
	115	29-S14M-115	6F	GG	129,23	126,57	138,00	100,00	-	133,0	148,0	-	10,20
	170	29-S14M-170	6F	GG	129,23	126,57	138,00	100,00	-	187,0	202,0	-	14,20
30	40	30-S14M-40	6F	GG	133,69	130,99	138,00	100,00	-	54,0	69,0	-	5,45
	55	30-S14M-55	6F	GG	133,69	130,99	138,00	100,00	-	70,0	85,0	-	6,60
	85	30-S14M-85	6F	GG	133,69	130,99	138,00	100,00	-	102,0	117,0	-	9,10
	115	30-S14M-115	6F	GG	133,69	130,99	138,00	100,00	-	133,0	148,0	-	11,20
	170	30-S14M-170	6F	GG	133,69	130,99	138,00	100,00	-	187,0	202,0	-	15,60
32	40	32-S14M-40	6F	GG	142,60	139,88	154,00	100,00	-	54,0	69,0	-	6,17
	55	32-S14M-55	6F	GG	142,60	139,88	154,00	100,00	-	70,0	85,0	-	7,60
	85	32-S14M-85	6F	GG	142,60	139,88	154,00	100,00	-	102,0	117,0	-	10,50
	115	32-S14M-115	6F	GG	142,60	139,88	154,00	100,00	-	133,0	148,0	-	13,20
	170	32-S14M-170	6F	GG	142,60	139,88	154,00	100,00	-	187,0	202,0	-	18,10
34	40	34-S14M-40	6F	GG	151,52	148,79	160,00	100,00	-	54,0	69,0	-	6,88
	55	34-S14M-55	6F	GG	151,52	148,79	160,00	100,00	-	70,0	85,0	-	8,60
	85	34-S14M-85	6F	GG	151,52	148,79	160,00	100,00	-	102,0	117,0	-	11,90
	115	34-S14M-115	6F	GG	151,52	148,79	160,00	100,00	-	133,0	148,0	-	14,80
	170	34-S14M-170	6F	GG	151,52	148,79	160,00	100,00	-	187,0	202,0	-	20,40
36	40	36-S14M-40	6F	GG	160,43	157,68	168,00	100,00	-	54,0	69,0	-	7,60
	55	36-S14M-55	6F	GG	160,43	157,68	168,00	100,00	-	70,0	85,0	-	9,60
	85	36-S14M-85	6F	GG	160,43	157,68	168,00	100,00	-	102,0	117,0	-	13,20
	115	36-S14M-115	6F	GG	160,43	157,68	168,00	120,00	-	133,0	148,0	-	16,60
	170	36-S14M-170	6F	GG	160,43	157,68	168,00	120,00	-	187,0	202,0	-	23,50
38	40	38-S14M-40	6F	GG	169,34	166,60	183,00	120,00	-	54,0	69,0	-	8,28
	55	38-S14M-55	6F	GG	169,34	166,60	183,00	120,00	-	70,0	85,0	-	10,80
	85	38-S14M-85	6F	GG	169,34	166,60	183,00	120,00	-	102,0	117,0	-	15,15
	115	38-S14M-115	6F	GG	169,34	166,60	183,00	120,00	-	133,0	148,0	-	19,20
	170	38-S14M-170	6F	GG	169,34	166,60	183,00	135,00	-	187,0	202,0	-	26,50
40	40	40-S14M-40	6F	GG	178,25	175,49	188,00	120,00	-	54,0	69,0	-	9,26
	55	40-S14M-55	6F	GG	178,25	175,49	188,00	120,00	-	70,0	85,0	-	11,20
	85	40-S14M-85	6F	GG	178,25	175,49	188,00	135,00	-	102,0	117,0	-	17,10
	115	40-S14M-115	6F	GG	178,25	175,49	188,00	135,00	-	133,0	148,0	-	20,56
	170	40-S14M-170	6F	GG	178,25	175,49	188,00	140,00	-	187,0	202,0	-	30,10
44	40	44-S14M-40	6WF	GG	196,08	193,28	211,00	120,00	-	54,0	69,0	-	10,32
	55	44-S14M-55	6WF	GG	196,08	193,28	211,00	120,00	-	70,0	85,0	-	12,50
	85	44-S14M-85	6F	GG	196,08	193,28	211,00	135,00	-	102,0	117,0	-	23,30
	115	44-S14M-115	6F	GG	196,08	193,28	211,00	140,00	-	133,0	148,0	-	28,00
	170	44-S14M-170	6F	GG	196,08	193,28	211,00	160,00	-	187,0	202,0	-	37,80
48	40	48-S14M-40	6WF	GG	213,90	211,11	226,00	135,00	-	54,0	69,0	-	11,50
	55	48-S14M-55	10WF	GG	213,90	211,11	226,00	135,00	-	70,0	70,0	-	13,70
	85	48-S14M-85	6F	GG	213,90	211,11	226,00	150,00	-	102,0	117,0	-	25,00
	115	48-S14M-115	6F	GG	213,90	211,11	226,00	150,00	-	133,0	148,0	-	35,00
	170	48-S14M-170	6F	GG	213,90	211,11	226,00	160,00	-	187,0	202,0	-	44,50

* Materiál: ST = ocel, GG = litina / ST = steel, GG = iron cast

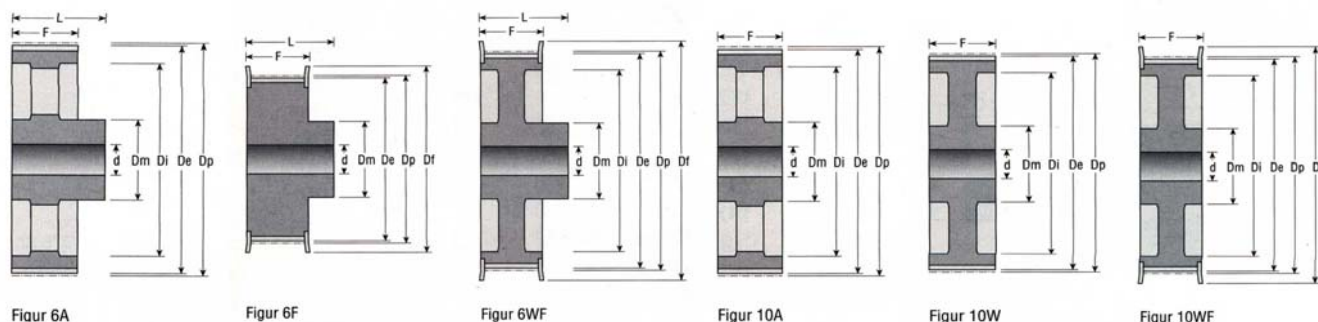

Typ S14M - Pro řemeny STD S14M - rozteč 14,0mm / For belts STD S14M - Pitch 14,0mm

Zubů Teeth	Šír.ř. Width	Označení / Obj.č. Part.No.	Typ Fig.	* Mat.	Dp [mm]	De [mm]	Df [mm]	Dm [mm]	Di [mm]	F [mm]	S [mm]	d [mm]	m [kg]
56	40	56-S14M-40	6WF	GG	249,55	246,76	256,00	135,00	207,00	54,0	69,0	-	13,05
55	40	56-S14M-55	10WF	GG	249,55	246,76	256,00	135,00	207,00	70,0	70,0	-	14,50
85	40	56-S14M-85	10WF	GG	249,55	246,76	256,00	150,00	207,00	102,0	102,0	-	25,00
115	40	56-S14M-115	6WF	GG	249,55	246,76	256,00	150,00	-	133,0	133,0	-	27,50
170	40	56-S14M-170	6WF	GG	249,55	246,76	256,00	160,00	-	187,0	202,0	-	61,00
60	40	60-S14M-40	6WF	GG	267,38	264,59	274,00	135,00	225,00	54,0	69,0	-	13,80
55	40	60-S14M-55	10WF	GG	267,38	264,59	274,00	135,00	225,00	70,0	70,0	-	15,10
85	40	60-S14M-85	10WF	GG	267,59	264,59	274,00	150,00	225,00	102,0	102,0	-	26,90
115	40	60-S14M-115	10WF	GG	267,38	264,59	274,00	150,00	225,00	133,0	133,0	-	31,30
170	40	60-S14M-170	6WF	GG	267,38	264,59	274,00	160,00	225,00	187,0	202,0	-	71,00
64	40	64-S14M-40	6WF	GG	285,21	282,41	296,00	135,00	242,00	54,0	69,0	-	14,40
55	40	64-S14M-55	10WF	GG	285,21	282,41	296,00	135,00	242,00	70,0	70,0	-	15,60
85	40	64-S14M-85	10WF	GG	285,21	282,41	296,00	150,00	242,00	102,0	102,0	-	28,20
115	40	64-S14M-115	10WF	GG	285,21	282,41	296,00	150,00	242,00	133,0	133,0	-	36,80
170	40	64-S14M-170	6WF	GG	285,21	282,41	296,00	180,00	-	187,0	202,0	-	81,00
72	40	72-S14M-40	6A	GG	320,86	318,06	-	135,00	278,00	54,0	69,0	19,0	16,90
55	40	72-S14M-55	10A	GG	320,86	318,06	-	135,00	278,00	70,0	70,0	19,0	18,50
85	40	72-S14M-85	10A	GG	320,86	318,06	-	150,00	278,00	102,0	102,0	19,0	28,80
115	40	72-S14M-115	10A	GG	320,86	318,06	-	150,00	278,00	133,0	133,0	19,0	32,83
170	40	72-S14M-170	10W	GG	320,86	318,06	-	180,00	278,00	187,0	187,0	19,0	61,40
80	40	80-S14M-40	6A	GG	356,51	353,71	-	135,00	314,00	54,0	69,0	19,0	18,50
55	40	80-S14M-55	10A	GG	356,51	353,71	-	135,00	314,00	70,0	70,0	19,0	20,00
85	40	80-S14M-85	10A	GG	356,51	353,71	-	150,00	314,00	102,0	102,0	19,0	30,10
115	40	80-S14M-115	10A	GG	356,51	353,71	-	150,00	314,00	133,0	133,0	19,0	35,55
170	40	80-S14M-170	10W	GG	356,51	353,71	-	180,00	314,00	187,0	187,0	19,0	65,00
84	40	84-S14M-40	6A	GG	374,33	371,54	-	135,00	332,00	54,0	69,0	19,0	19,50
55	40	84-S14M-55	10A	GG	374,33	371,54	-	135,00	332,00	70,0	70,0	19,0	21,60
85	40	84-S14M-85	10A	GG	374,33	371,54	-	150,00	332,00	102,0	102,0	19,0	31,70
115	40	84-S14M-115	10A	GG	374,33	371,54	-	150,00	332,00	133,0	133,0	19,0	38,10
170	40	84-S14M-170	10A	GG	374,33	371,54	-	180,00	332,00	187,0	187,0	19,0	67,50
90	40	90-S14M-40	6A	GG	401,07	398,28	-	135,00	358,00	54,0	69,0	19,0	20,00
55	40	90-S14M-55	10A	GG	401,07	398,28	-	135,00	358,00	70,0	70,0	19,0	22,60
85	40	90-S14M-85	10A	GG	401,07	398,28	-	150,00	358,00	102,0	102,0	19,0	33,00
115	40	90-S14M-115	10A	GG	401,07	398,28	-	150,00	358,00	133,0	133,0	19,0	41,00
170	40	90-S14M-170	10A	GG	401,07	398,28	-	180,00	358,00	187,0	187,0	19,0	68,00
112	40	112-S14M-40	6A	GG	499,11	496,32	-	135,00	456,00	54,0	69,0	19,0	26,70
55	40	112-S14M-55	10A	GG	499,11	496,32	-	135,00	456,00	70,0	70,0	19,0	29,50
85	40	112-S14M-85	10A	GG	499,11	496,32	-	150,00	456,00	102,0	102,0	19,0	41,80
115	40	112-S14M-115	10A	GG	499,11	496,32	-	150,00	456,00	133,0	133,0	19,0	54,40
170	40	112-S14M-170	10A	GG	499,11	496,32	-	200,00	456,00	187,0	187,0	19,0	87,50
144	40	144-S14M-40	6A	GG	641,71	638,92	-	135,00	600,00	54,0	69,0	19,0	38,00
55	40	144-S14M-55	10A	GG	641,71	638,92	-	135,00	600,00	70,0	70,0	19,0	39,00
85	40	144-S14M-85	10A	GG	641,71	638,92	-	150,00	600,00	102,0	102,0	19,0	52,40
115	40	144-S14M-115	10A	GG	641,71	638,92	-	165,00	600,00	133,0	133,0	19,0	67,80
170	40	144-S14M-170	10A	GG	641,71	638,92	-	220,00	600,00	187,0	187,0	19,0	114,80

* Materiál: ST = ocel, GG = litina / ST = steel, GG = iron cast