


Válečkové řetězy podle DIN 8188 (americká řada) - jednořadé

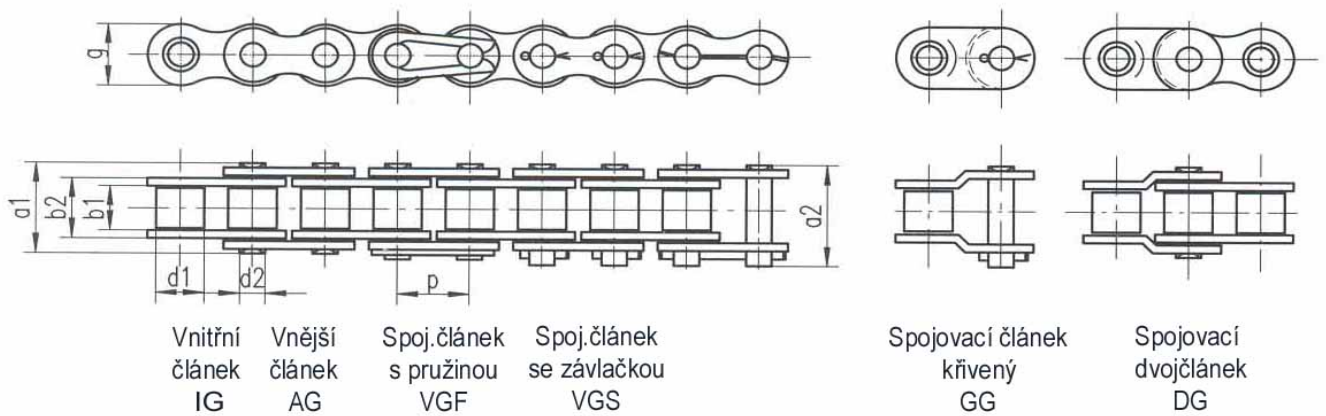

Označení		p rozteč v palcích	b ₁ min. mm	b ₂ max. mm	d ₁ max. mm	d ₂ mm	a ₁ max. mm	a ₂ max. mm	g max. mm	Plocha článku cm ²	Síla k přetržení kN	Hmotnos kg/m		
ISO	ANSI													
04 C - 1	●	25-1	1/4"	6,35	3,18	4,80	3,30	2,31	9,10	11,60	6,67	0,11	3,5	0,13
06 C - 1	●	35-1	3/8"	9,53	4,77	7,47	5,08	3,58	13,20	16,50	9,05	0,27	7,9	0,31
08 A - 1		40-1	1/2"	12,70	7,95	11,18	7,92	3,96	17,80	21,70	12,07	0,44	13,8	0,61
10 A - 1	△	50-1	5/8"	15,88	9,53	13,84	10,16	5,08	21,80	25,90	15,09	0,70	22,2	1,01
12 A - 1	△○	60-1	3/4"	19,05	12,70	17,75	11,91	5,94	26,90	31,50	18,08	1,06	31,8	1,5
16 A - 1		80-1	1"	25,40	15,88	22,61	15,88	7,92	33,50	38,90	24,13	1,79	56,7	2,6
20 A - 1		100-1	1 1/4"	31,75	19,05	27,40	19,05	9,53	41,10	47,20	30,18	2,62	88,5	3,7
24 A - 1		120-1	1 1/2"	38,10	25,40	37,00	22,23	11,10	50,80	57,40	36,20	3,94	127,0	5,5
28 A - 1		140-1	1 3/4"	44,45	25,40	37,00	25,40	12,70	54,90	62,30	42,24	4,72	172,4	7,5
32 A - 1		160-1	2"	50,80	31,75	45,00	28,58	14,27	65,50	73,40	48,26	6,50	226,8	9,7
40 A - 1		200-1	2 1/2"	63,50	38,10	54,70	39,68	19,84	80,30	90,50	60,33	10,90	353,8	15,8
48 A - 1		240-1	3"	76,20	47,35	67,50	47,63	23,80	95,50	106,00	72,39	16,10	510,3	22,6

○ lze dodat i bez válečků ● pouzdrový řetěz △ lze dodat také s rovnými destičkami