


Válečkové řetězy podle DIN 8188 (americká řada) - trojřadé

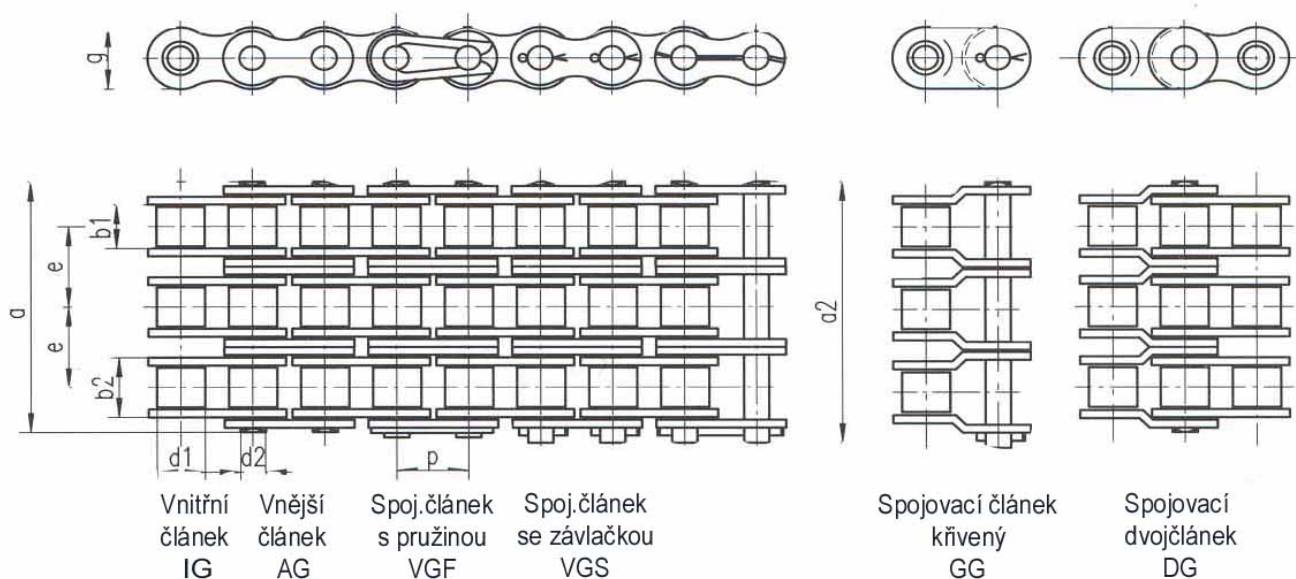

Označení		p rozteč v palcích	b ₁ min. mm	b ₂ max. mm	d ₁ max. mm	d ₂ mm	a ₁ max. mm	a ₂ max. mm	g max. mm	e rozteč mm	Plocha člásku cm ²	Síla k přetržení kN	Hmotn. kg/m
ISO	ANSI												

06 C - 3 ●	35-3	3/8"	9,53	4,77	7,47	5,08	3,58	31,80	33,00	9,05	10,13	0,81	28,0	1,01
08 A - 3	40-3	1/2"	12,70	7,95	11,18	7,92	3,96	46,70	50,60	12,07	14,38	1,31	42,3	1,78
10 A - 3	50-3	5/8"	15,88	9,53	13,84	10,16	5,08	57,90	62,00	15,09	18,11	2,10	66,6	2,89
12 A - 3	60-3	3/4"	19,05	12,70	17,75	11,91	5,94	72,60	77,20	18,08	22,78	3,18	95,4	4,28
16 A - 3	80-3	1"	25,40	15,88	22,61	15,88	7,92	91,70	97,10	24,13	29,29	5,37	170,1	7,47
20 A - 3	100-3	1 1/4"	31,75	19,05	27,40	19,05	9,53	113,00	119,10	30,18	35,76	7,86	265,5	11,01
24 A - 3	120-3	1 1/2"	38,10	25,40	37,00	22,23	11,10	141,70	148,30	36,20	45,44	11,82	381,0	16,5
28 A - 3	140-3	1 3/4"	44,45	25,40	37,00	25,40	12,70	152,40	159,80	42,24	48,87	14,16	517,2	21,7
32 A - 3	160-3	2"	50,80	31,75	45,00	28,58	14,27	182,90	190,80	48,26	58,55	19,50	680,4	28,3
40 A - 3	200-3	2 1/2"	63,50	38,10	54,70	39,68	19,84	223,50	233,70	60,33	71,55	32,70	1061,4	48,0
48 A - 3	240-3	3"	76,20	47,35	67,50	47,63	23,80	271,30	281,80	72,39	87,83	43,30	1530,9	66,0

● pouzdrový řetěz