


Válečkové řetězy podle DIN 8187 (evropská řada) - dvojřadé

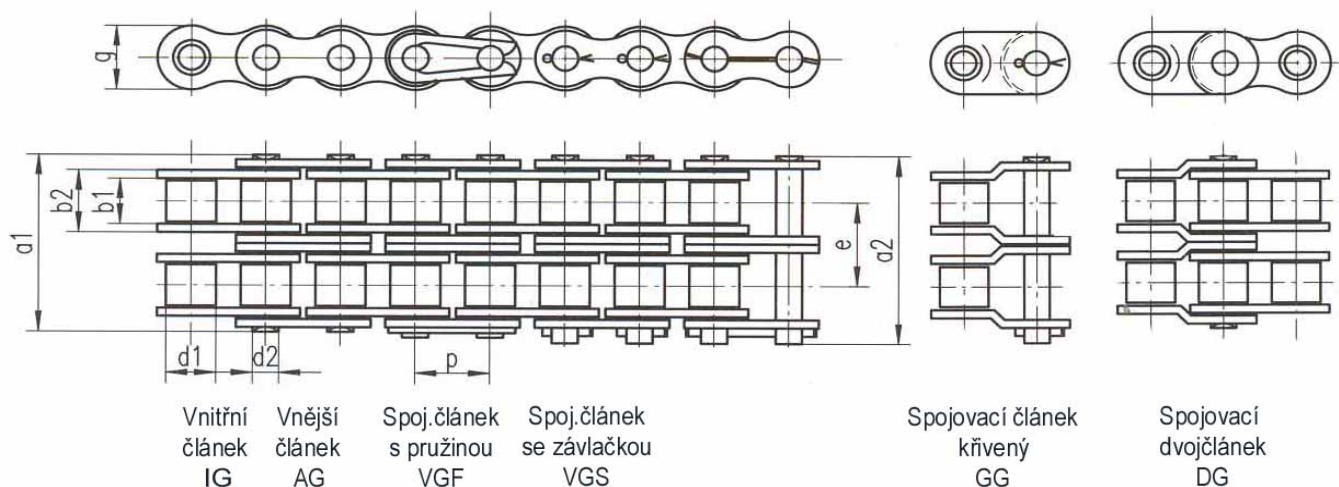

ISO	Označení		p mm	b ₁ min. mm	b ₂ max. mm	d ₁ max. mm	d ₂ mm	a ₁ max. mm	a ₂ max. mm	g max. mm	e rozteč mm	Plocha článku cm ²	Síla k přetržení kN	Hmotnost kg/m
	v palcích	pxb ₁												
05 B - 2	8x3x5mm		8,0	3,00	4,77	5,00	2,31	14,30	17,40	7,10	5,64	0,22	7,5	0,36
06 B - 2	● 3/8"x5,8mm		9,525	5,72	8,53	6,35	3,28	23,80	27,10	8,20	10,24	0,55	16	0,78
08 B - 2	○ 1/2"x5/16"		12,70	7,75	11,30	8,51	4,45	31,00	34,90	11,80	13,92	1,00	32	1,35
10 B - 2	○ 5/8"x3/8"		15,875	9,65	13,28	10,16	5,08	36,20	40,30	14,70	16,59	1,34	40	1,85
12 B - 2	○ 3/4"x29/64"		19,05	11,68	15,62	12,07	5,72	42,20	46,80	16,10	19,46	1,78	53	2,5
16 B - 2	○ 1"x17mm		25,40	17,02	25,40	15,88	8,28	68,00	73,40	21,00	31,88	4,21	106	5,4
20 B - 2	○ 1 1/4"x3/4"		31,75	19,56	29,00	19,05	10,19	79,70	85,10	26,40	36,45	5,91	170	7,2
24 B - 2	○ 1 1/2"x1"		38,10	25,40	37,90	25,40	14,63	101,00	107,60	33,40	48,36	11,09	280	13,5
28 B - 2	○ 1 3/4"x1 1/4"		44,45	30,99	46,50	27,94	15,90	124,00	131,40	37,08	59,56	14,81	360	16,6
32 B - 2	○ 2"x1 1/4"		50,80	30,99	45,50	29,21	17,81	126,00	133,90	42,20	58,55	16,23	450	21,0
40 B - 2	○ 2 1/2"x1 1/2"		63,50	38,10	55,70	39,37	22,89	154,90	164,90	52,96	72,29	25,52	630	32,0
48 B - 2	○ 3"		76,20	45,72	70,50	48,26	29,24	194,00	204,00	63,80	91,21	41,26	1000	50,0
56 B - 2	● 3 1/2"		88,90	53,34	81,30	53,98	34,32	221,00	232,00	77,80	106,60	55,82	1600	70,0
64 B - 2	● 4"		101,60	60,96	92,00	63,50	39,40	250,00	263,00	90,10	119,89	72,50	2000	120,0
72 B - 2	● 4 1/2"		114,30	68,58	103,80	72,39	44,50	283,00	297,70	103,60	136,27	92,34	2500	160,0

○ lze dodat také s rovnými destičkami ● s rovnými destičkami

Válečkové řetězy se vyrábí také s povrchovou úpravou - pozinkované/poniklované a v nerezovém provedení.