


Válečkové řetězy podle DIN 8187 - trojřadé

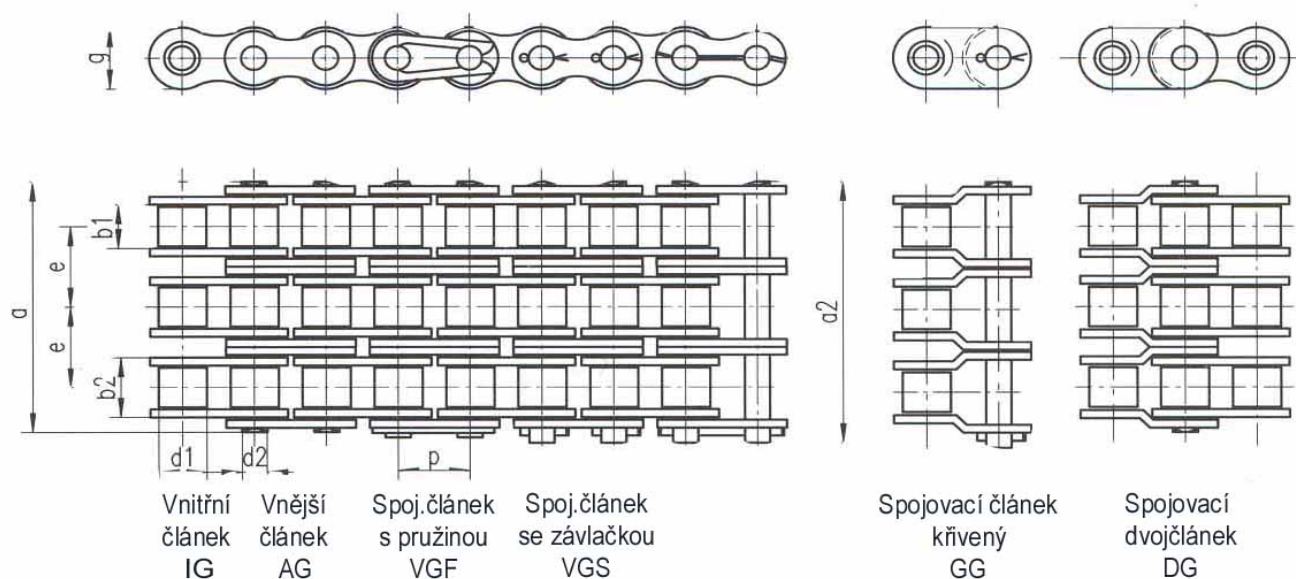

ISO	Označení		p mm	b ₁ min. mm	b ₂ max. mm	d ₁ max. mm	d ₂ mm	a ₁ max. mm	a ₂ max. mm	g max. mm	e rozteč mm	Plocha článku cm ²	Síla k přetržení kN	Hmotnost kg/m
	v palcích	pxb ₁												
06 B - 3	●	3/8"x5,8mm	9,525	5,72	8,53	6,35	3,28	34,00	37,30	8,20	10,24	0,93	23,6	1,2
08 B - 3	○	1/2"x5/16"	12,70	7,75	11,30	8,51	4,45	44,90	48,80	11,80	13,92	1,50	47,5	2,0
10 B - 3	○	5/8"x3/8"	15,875	9,65	13,28	10,16	5,08	52,80	56,90	14,70	16,59	2,02	60	2,8
12 B - 3	○	3/4"x29/64"	19,05	11,68	15,62	12,07	5,72	61,70	66,30	16,10	19,46	2,68	80	3,8
16 B - 3	○	1"x17mm	25,40	17,02	25,40	15,88	8,28	99,90	105,30	21,00	31,88	6,32	160	8,0
20 B - 3	○	1 1/4"x3/4"	31,75	19,56	29,00	19,05	10,19	116,00	122,20	26,40	36,45	8,86	250	11,0
24 B - 3	○	1 1/2"x1"	38,10	25,40	37,90	25,40	14,63	150,00	156,80	33,40	48,36	16,64	425	21,0
28 B - 3	○	1 3/4"x1 1/4"	44,45	30,99	46,50	27,94	15,90	184,00	191,70	37,08	59,56	22,21	530	25,0
32 B - 3	○	2"x1 1/4"	50,80	30,99	45,50	29,21	17,81	184,00	192,40	42,20	58,55	24,34	670	32,0
40 B - 3	○	2 1/2"x1 1/2"	63,50	38,10	55,70	39,37	22,89	227,00	237,40	52,96	72,29	38,28	950	48,0
48 B - 3	○	3"	76,20	45,72	70,50	48,26	29,24	281,00	292,10	63,80	91,21	61,89	1500	75,0
56 B - 3	●	3 1/2"	88,90	53,34	81,30	53,98	34,32	330,00	341,70	77,80	106,60	93,73	2240	105,0
64 B - 3	●	4"	101,60	60,96	92,00	63,50	39,40	370,00	383,70	90,10	119,89	108,75	3000	180,0
72 B - 3	●	4 1/2"	114,30	68,58	103,80	72,39	44,50	420,00	434,30	103,60	136,27	138,50	3750	240,0

○ lze dodat také s rovnými destičkami ● s rovnými destičkami

Válečkové řetězy se vyrábí také s povrchovou úpravou - pozinkované/poniklované a v nerezovém provedení.