


SG02 / SG03

The cost-effective welding technology.
 SG02 for PU
 SG03 for TPE

Features at a glance

- Easy and safe operation.
- Fixed, unregulated temperature setting.
- Reaches the welding temperature after approx. 10 min.
- Small, convenient and tough welding tool.
- No adhesion of PU and TPE materials, thanks to Teflon-coated welding paddle.
- Easy to clean with a cotton cloth.
- **Caution!** Not suitable for continuous use.

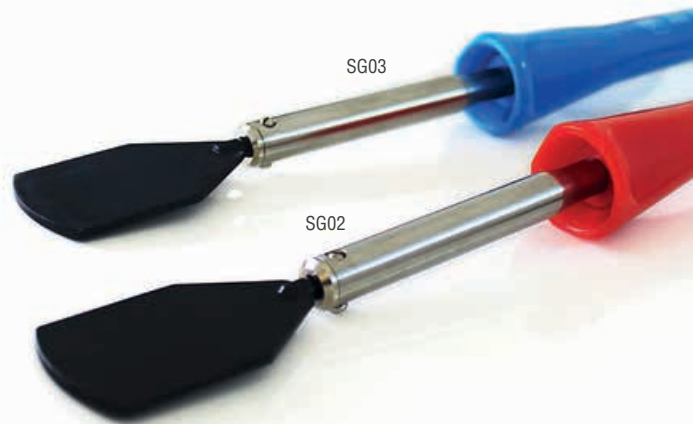

Scope of delivery:

1 pc. SG02 welding tool
 for Polyurethane (PU) 280 °C - 290 °C

or

1 pc. SG03 welding tool
 for Polyester (TPE) 225 °C - 240 °C

Dimensions: 280 x 33 x 33 mm (HxWxD)

Weight: approx. 227 g

Heating time: approx. 10 min.

Power: 80W (SG02); 40W (SG03)

Description

SG02 PU - 230 V
 SG03 TPE - 230 V

Order No.

FBWSG02
 FBWSG03

Spare parts

Spare paddle SG02 or SG03

Order No. **FBWTC72**

Dimensions (HxWxD): 35 x 35 x 2 mm



Spare paddle SG02 or SG03 for flat belts

Order No. **FBWTC76**

Dimensions (HxWxD): 22,5 x 75 x 2 mm

