

CONTI® SYNCHROCOLOR

Silicone-free timing belt - free of substances that damage paintwork

Bezsilikonové ozubené řemeny bez látek narušujících procesy lakování.

Properties / Vlastnosti:

- Temperature range from -20 °C to +100 °C, depending on application
- Paint compatible
- Silicon-free
- Antistatic in accordance with ISO 9563
- Conditionally resistant to oil
- Ozone-resistant
- Suitable for tropical climates
- Resistant to aging
- Suitable for reverse flexing/reverse tensioning idlers
- Maintenance-free

- Teplotní odolnost v závislosti na aplikaci od -20 °C do +100 °C
- Vhodné pro použití v lakovnách
- Bez silikonů
- Antistatické podle ISO 9563
- Podmíněná odolnost proti oleji
- Odolnost proti ozonu
- Vhodné pro tropické podnebí
- Zvýšená odolnost proti stárnutí
- Vhodné pro použití s vnějším ohybem / vnějšími napínacími kladkami
- Bez nutnosti údržby



Heavy-duty
CONTI® SYNCHROCOLOR CXP and
CONTI® SYNCHROCOLOR CXA

HTD


Profile	Length range L _p (mm)
HTD 8M Color	480 - 2800
HTD 14M Color	966 - 3500

HTD CXP

Profile	Length range L _p (mm)
HTD 8M Color CXP	480 - 2800
HTD 14M Color CXP	966 - 3150

HTD CXA

Profile	Length range L _p (mm)
HTD 8M Color CXA	480 - 3408
HTD 14M Color CXA	1190 - 4578

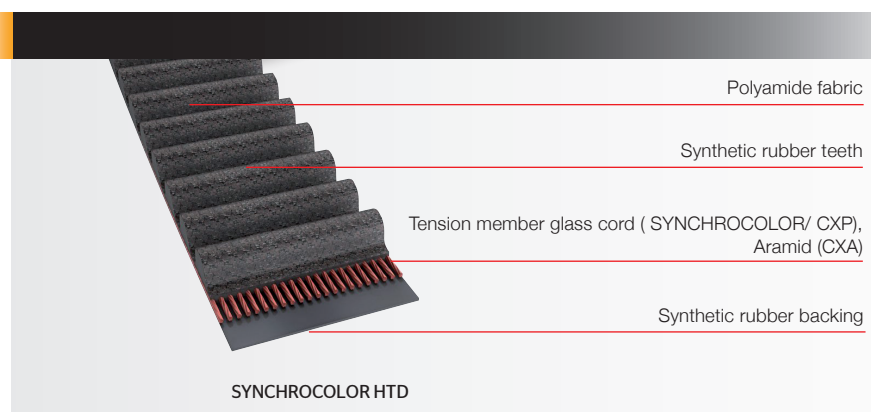

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/disclosure

Power Transmission Group

ContiTech Antriebssysteme GmbH
D-30169 Hannover · Phone +49 511 938 - 71
industrie.as@ptg.contitech.de

Autorizovaný distributor:

TYMA CZ, s.r.o.

Na Pískách 731/12, CZ - 400 04 Trmice

Tel.: +420 475 655 010

E-mail: info@tyma.cz www.tyma.cz

ContiTech