


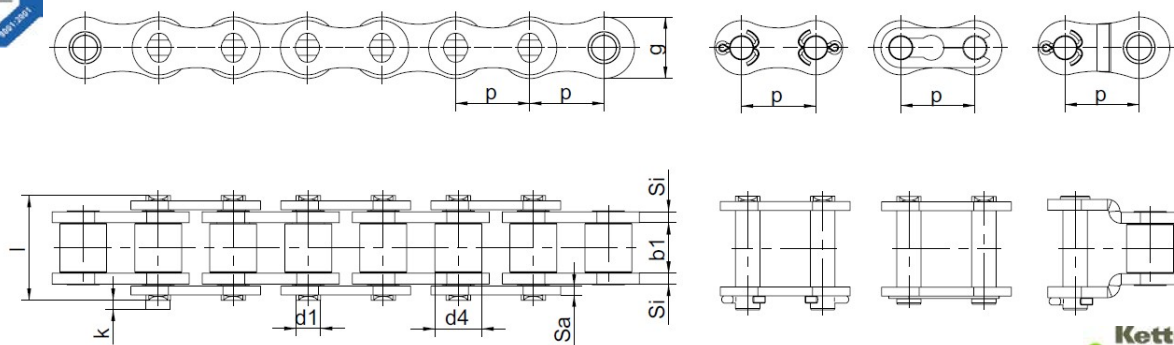

Jednořadé podle DIN 8188 / ISO 606 / Simplex according to ISO 606

TGI - Tri Guard Inchromised

Označení / Type	p	b ₁	d ₄	d ₁	l	k	S _i	S _a	g	e	f	Síla k přetržení	Hmotnost		
ISO	ANSI	Rozteč/pitch		Breaking load										Weight	
		inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	cm ²	N	kg/m	
08A-1 TGI	40-1	1/2"	12,7	7,9	7,9	3,97	16,32	2,4	1,5	1,5	12,06	–	0,44	17200	0,62
10A-1 TGI	50-1	5/8"	15,875	9,5	10,14	5,08	20,3	2,17	2	2	15,08	–	0,7	27400	1,01
12A-1 TGI	60-1	3/4"	19,05	12,7	11,88	5,95	25,26	2,8	2,4	2,4	18,09	–	1,05	38200	1,45
16A-1 TGI	80-1	1"	25,4	15,85	15,84	7,93	32,76	3,67	3,2	3,2	24,13	–	1,78	72500	2,55