


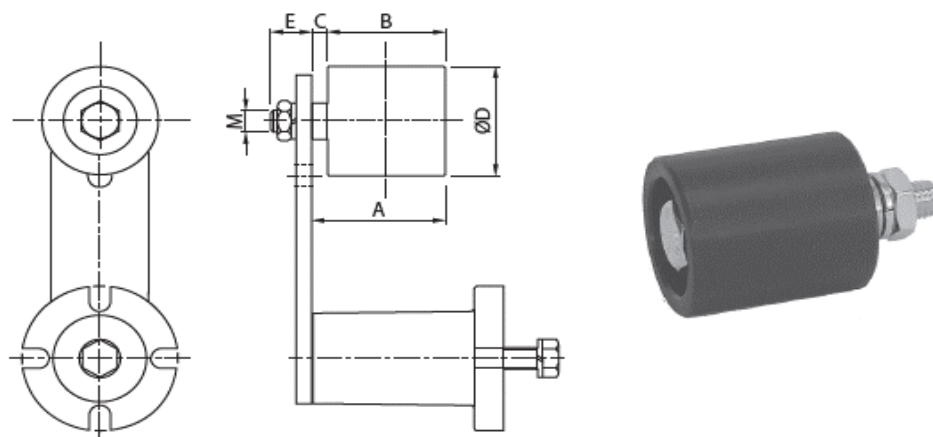


Typ RP - polyamid / polyamid

Typ type	Velikost size	Hmotnost weight	A	B	C	ØD	E	M	V _{max} (rpm)
RP 1	RE 10	0,08	38	35	3	30	13	M8	8000
RP 2/3	RE 20-30	0,18	51	45	6	40	16	M10	8000
RP 4	RE 40	0,40	68	60	8	60	21	M12	6000
RP 5	RE 50	1,20	99	90	9	80	28	M20	5000
RP 6	RE 60	1,70	142	135	7	90	27	M20	4500

Plastové rolny s ložisky mazáním. / The roller is in plastic installed on greased bearings.

Maximální pracovní teplota do 70°C. / Roller operating temperature ≤70°C.

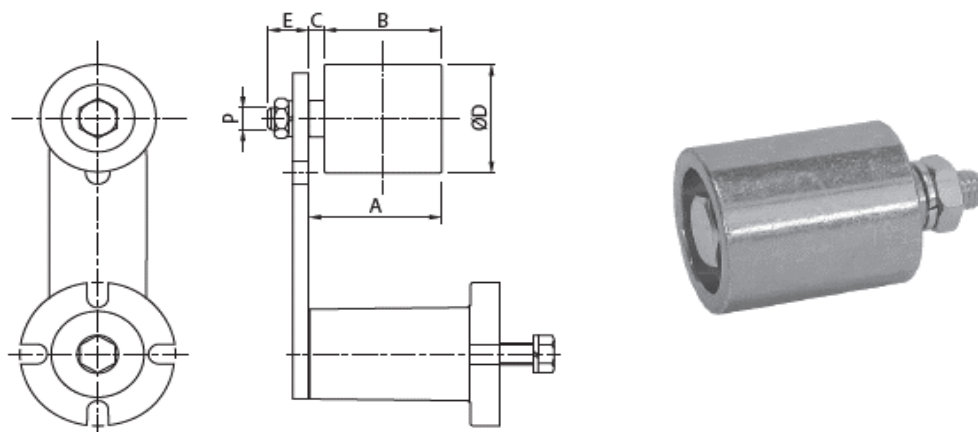

Typ RU - ocel - pozink / galvanized steel

Typ type	Velikost size	Hmotnost weight	A	B	C	ØD	E	P	V _{max} (rpm)
RU 1	RE 10	0,16	38	35	3	30	13	M8	15000
RU 2/3	RE 20-30	0,37	51	45	6	40	16	M10	12000
RU 4	RE 40	0,85	68	60	8	60	21	M16	9500
RU 5	RE 50	2,09	99	90	9	80	28	M20	6500
RU 6	RE 60	2,44	142	135	7	90	27	M20	6500

Ocelové rolny s ložisky s mazáním. / The roller is in galvanized steel installed on greased bearings.

Maximální pracovní teplota do 100°C. / Roller operating temperature ≤100°C.