



Objednávací číslo / Part.No.

POLYROPE ZV 033 AM 320


POLYFLAT ZV 030 AM 320

F25, F30, F33, F50, F75 - šířka pásu / belts width 25 mm, 30 mm, 33 mm, 50 mm, 75 mm


K0 - jen závěs s klínem / wedge socket housing, **KB** - s čepem / with pin, **A0** - se šroubem s okem bez matice / with eye bolt, **AM** - se šroubem a maticí / with eye bolt and nut, **D0** - se šroubem, maticí a pružinou / with eye bolt, nut and pressure springs, **F1-F3** - se šroubem, maticí a silentblokem / with 1 buffer, **GEO** - provedení s vnitřním závitem pro šroub / with internal screw thread, **MED** - zkrácené provedení / medium type, **KRZ** - krátký typ s bočním okem / short type

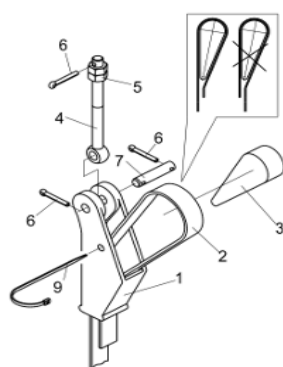

Typ A0

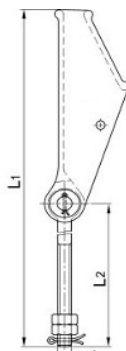

Typ AM

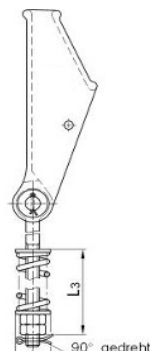

Typ D0



Typ F1



ZV RG1 F25 AM 300 SSN



ZV RG1 F33 K0 000 KRZ

Více informací najdete na www.polyrope.info / More information at www.polyrope.info



Fixing- kit with wedge for Conti Polyflat and Polyrope

optional with

pin galvanized surface

With type testing similar to EN 13411-6

ATTENTION: The strength of the eye bolt must be in accordance to the strength of the lifting appliance.

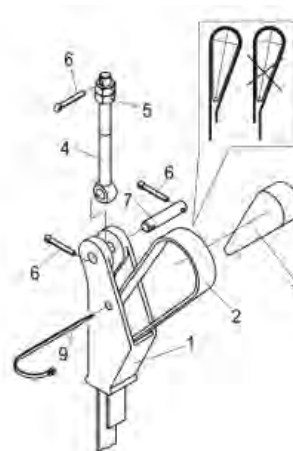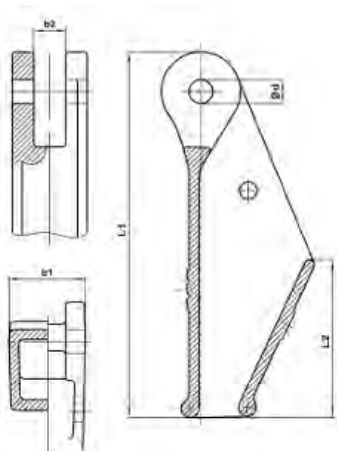

width of lifting	Wedge socket Item- no.	applicable with	b1	b2	ød	L1	L2	pins
20 - 25	ZV 025 K0 000	M12	38	16	12	230	87	12 x 58
20 - 25	ZV 025 K0 000	M12	38	16	12	185	80	12 x 58
30	ZV 030 K0 000	M12	45	16	12	185	80	12 x 65
33	ZV 033 K0 000	M12	48	16	12	185	80	12 x 65
40	ZV 040 K0 000	M16	59	18	16,5	228	86	16 x 78
50	ZV 050 K0 000	M16	75	18	16,5	230	87	16 x 94
60	ZV 060 K0 000	M16	87	18	16,5	230	87	16 x 106
75	ZV 075 K0 000	M20	106	23	18	251	100	18 x 128

material socke housingt: G20Mn5

material wedge: 226D


material pin: 8.8

Subject to technical alternations

Complete suspensions for Conti Polyflat and Polyrope

With type testing similar to EN 13411-6

ATTENTION: The strength of the eye bolt must be in accordance to the strength of the lifting appliance.

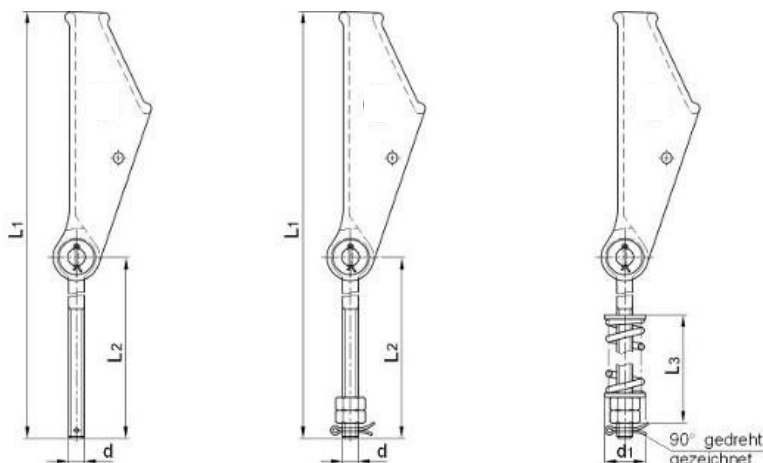

width(mm) of lifting	main type A Item- no.	d	L1	L2	type AM Item- no.	type D Item- no.	d1	L3
20-25	ZV 025 A0 320	M12	526	320	ZV 025 AM 320	ZV 025 D0 320	45	167
20-25	ZV 025 A0 320 MED	M12	481	320	ZV 025 AM 320 MED	ZV 025 D0 320 MED	45	167
30	ZV 030 A0 320 MED	M12	481	320	ZV 030 AM 320 MED	ZV 030 D0 320 MED	45	167
33	ZV 033 A0 320 MED	M12	481	320	ZV 033 AM 320 MED	ZV 033 D0 320 MED	45	167
40	ZV 040 A0 320	M16	524	320	ZV 040 AM 320	ZV 040 D0 320	46	173
50	ZV 050 A0 320	M16	526	320	ZV 050 AM 320	ZV 050 D0 320	46	173
60	ZV 060 A0 320	M16	526	320	ZV 060 AM 320	ZV 060 D0 320	46	173
75	ZV 075 A0 400	M20	626	400	ZV 075 AM 400	ZV 075 D0 400	54	201,5

L2 =Standard lengths of the eye bolts are in mm, further lengths possible


When ordering, the required length of the eye bolts is to be incorporated into the item- no as per following example:
suspensions type A for 20-25 mm width of lifting appliance and an eye bolts length of 450 mm: **ZV 025 A0 450**

Subject to technical alternations

Complete suspensions for Conti Polyflat and Polyrope

With type testing similar to EN 13411-6

ATTENTION: The strength of the eye bolt must be in accordance to the strength of the lifting appliance.

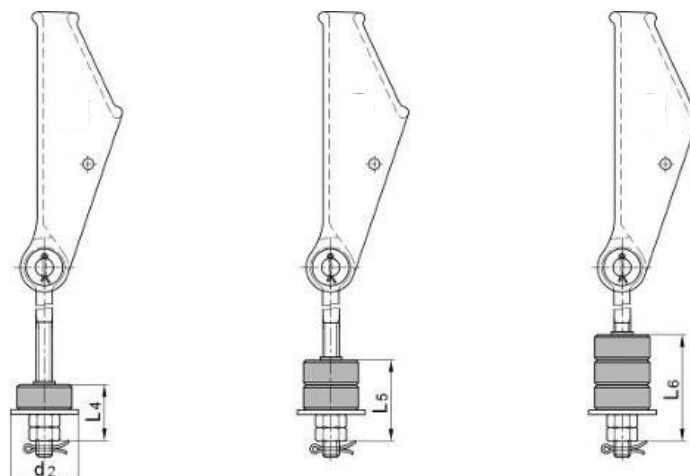

width (mm) of lifting	main type A Item- no.	d	L1	L2	type FP Item- no.	d2	L4	type FP 2 Item- no.	L5	type FP 3 Item- no.	L6
20-25	ZV 025 A0 320	M12	526	320	ZV 025 F1 320	50	51	ZV 025 F2 320	79	ZV 025 F3 320	107
20-25	ZV 025 A0 320 MED	M12	481	320	ZV 025 F1 320 MED	50	51	ZV 025 F2 320 MED	79	ZV 025 F3 320 MED	107
30	ZV 030 A0 320 MED	M12	481	320	ZV 030 F1 320 MED	50	51	ZV 030 F2 320 MED	79	ZV 030 F3 320 MED	107
33	ZV 033 A0 320 MED	M12	481	320	ZV 033 F1 320 MED	50	51	ZV 033 F2 320 MED	79	ZV 033 F3 320 MED	107
40	ZV 040 A0 320	M16	524	320	ZV 040 F1 320	58	59	ZV 040 F2 320	87	ZV 040 F3 320	115
50	ZV 050 A0 320	M16	526	320	ZV 050 F1 320	58	59	ZV 050 F2 320	87	ZV 050 F3 320	115
60	ZV 060 A0 320	M16	526	320	ZV 060 F1 320	58	59	ZV 060 F2 320	87	ZV 060 F3 320	115
75	ZV 075 A0 400	M20	626	400	ZV 075 F1 400	68	65	ZV 075 F2 400	93	ZV 075 F3 400	121

L2 =Standard lengths of the eye bolts are in mm, further lengths possible

When ordering, the required length of the eye bolts is to be incorporated into the item- no as per following example:
suspensions type A for 20-25 mm width of lifting appliance and an eye bolts length of 450 mm: **ZV 025 A0 450**


Subject to technical alternations

Fixing- kit with internal screw thread for Conti Polyflat and Polyrope

galvanized surface

With type testing similar to EN 13411-6

ATTENTION: The strength of the threaded rod must be in accordance to the strength of the lifting appliance.

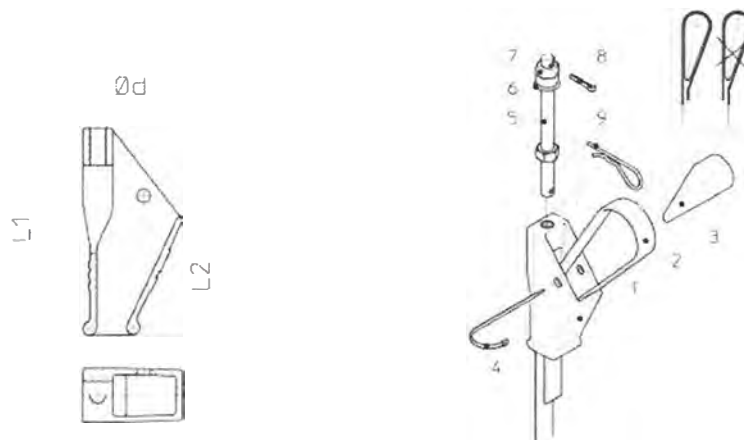

width of lifting appliance	Wedge socket housing Item- no.	b1	Ød	L1	L2
20 - 25	ZV 025 00 GE0	36	12	138	78,45
30	ZV 030 00 GE0	45	12	138	78,45
33	ZV 033 00 GE0	46	12	138	78,45
40	ZV 040 00 GE0	55	16	138	78,45

material socket housing:

G20Mn5 material wedge:

226D

Subject to technical alternations


Short fixing- kit with wegde for Conti Polyflat and Polyrope

optional with pin

galvanized surface

With type testing similar to EN 13411-6

ATTENTION: The strength of the eye bolt must be in accordance to the strength of the lifting appliance.

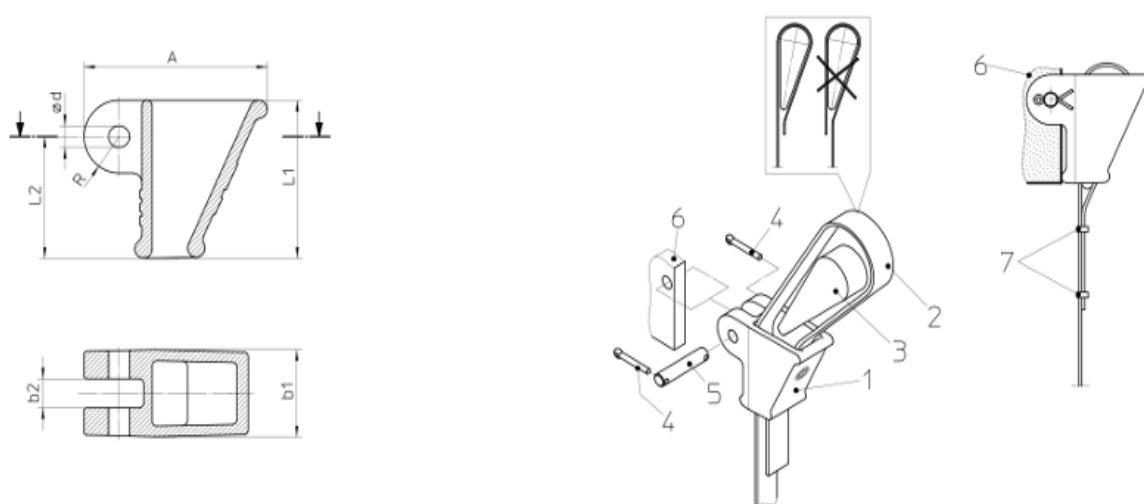

width of lifting appliance	Wedge socket housing	applicable with eyebolt	A	b1	b2	ød	L1	L2	pins available
	Item- no.								
20 - 25	ZV 025 K0 000 KRZ	M12	104	38	16	12	87	67	12 x 58
33	ZV 033 K0 000 KRZ	M12	105	48	16	12	87	67	12 x 65
60	ZV 060 K0 000 KRZ	M16	140	87	23	18	100	80	16 x 106
75	ZV 075 K0 000 KRZ	M20	140	106	23	18	100	80	18 x 128

material socket housing:

G20Mn5 material wedge: 226D

material pin: 8.8

Wedge socket housing incl. wedge and pin -

ZV 025 KB 000 KRZ

Subject to technical alternations