


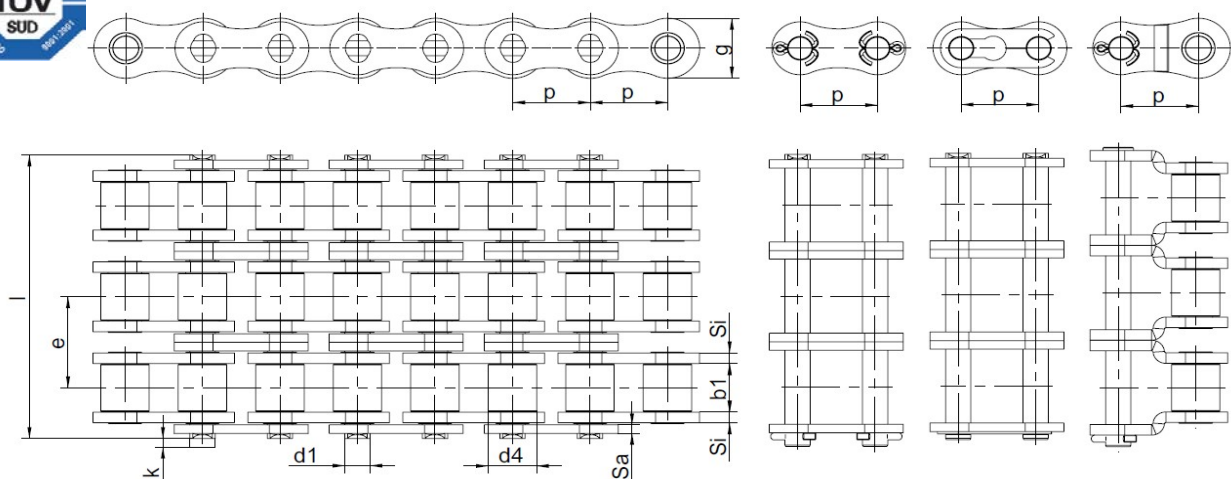

Třířadé podle DIN 8187 / ISO 606 / Triplex according to ISO 606

ZP - Zinc Plated

Označení / Type	p	b ₁	d ₄	d ₁	l	k	S _i	S _a	g	e	f	Síla k přetržení	Hmotnost	
ISO	p × b ₁											Breaking load	Weight	
	palce/inch (mm)	mm	mm	mm	mm	mm	mm	mm	mm	mm	cm ²	N	kg/m	
*06B-3-ZP	3/8" × 7/32"	9,525	5,72	6,35	3,28	33,5	2,3	1,3	1,3	8,2	10,24	0,84	24900	1,16
08B-3-ZP	1/2" × 5/16"	12,7	7,75	8,51	4,45	45,1	1,1	1,6	1,6	11,8	13,92	1,51	47500	2,03
10B-3-ZP	5/8" × 3/8"	15,875	9,65	10,16	5,08	52,7	1,4	1,7	1,7	14,7	16,59	2,02	66700	2,77
12B-3-ZP	3/4" × 29/64"	19,05	11,68	12,07	5,72	61,5	1,5	1,85	1,85	16,1	19,46	2,68	86700	3,46
16B-3-ZP	1" × 17,02 mm	25,4	17,02	15,88	8,28	99,8	3,3	4,2	3,1	21	31,88	6,31	160000	8,13
20B-3-ZP	1 1/4" × 3/4"	31,75	19,56	19,05	10,19	114,2	3,5	4,5	3,5	26,3	36,45	8,87	250000	10,82
24B-3-ZP	1 1/2" × 1"	38,1	25,4	25,4	14,63	150,1	4,7	6	4,8	33,25	48,36	16,63	425000	20,10
28B-3-ZP	1 3/4" × 1 1/4"	44,45	30,99	27,94	15,9	184,2	5,3	7,5	6	36,8	59,56	22,18	530000	24,92
32B-3-ZP	2" × 1 1/4"	50,8	30,99	29,21	17,81	183,1	5,8	7	6,4	42	58,55	24,31	670000	31,56

* s rovnými destičkami / with Straight Plates