


## Válečkové řetězy podle DIN 8188 (americká řada) - dvořradé

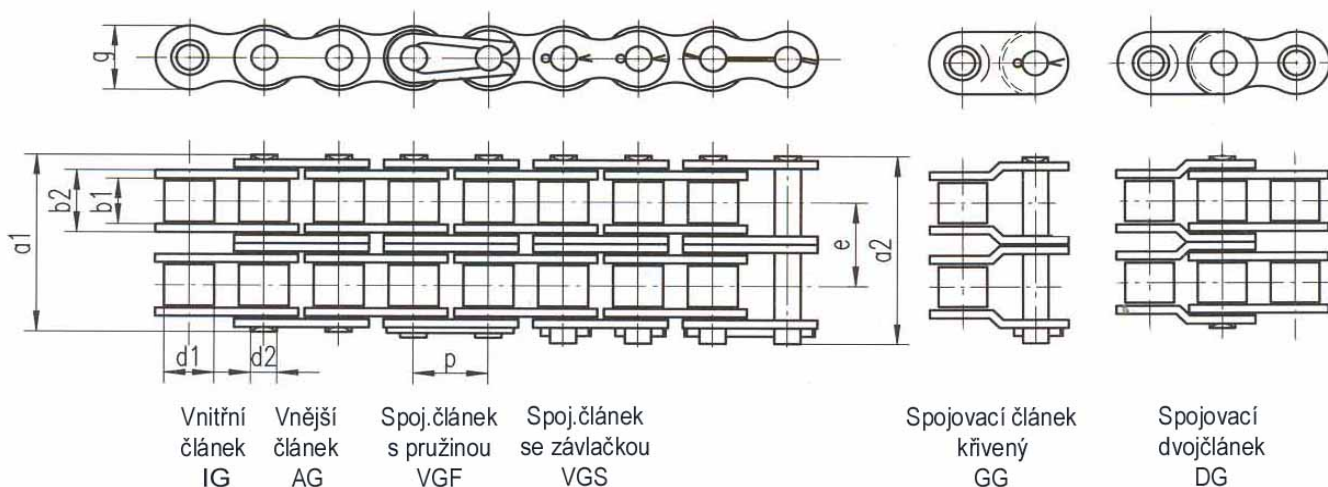

Označení		p rozteč v palcích	b <sub>1</sub> min. mm	b <sub>2</sub> max. mm	d <sub>1</sub> max. mm	d <sub>2</sub> mm	a <sub>1</sub> max. mm	a <sub>2</sub> max. mm	g max. mm	e rozteč mm	Plocha článku cm <sup>2</sup>	Síla k přetržení kN	Hmotn. kg/m	
ISO	ANSI													
06 C - 2 ●	35-2	3/8"	9,53	4,77	7,47	5,08	3,58	21,60	29,90	9,05	10,13	0,54	18,6	0,67
08 A- 2	40-2	1/2"	12,70	7,95	11,18	7,92	3,96	32,30	36,20	12,07	14,38	0,88	28,2	1,19
10 A- 2	50-2	5/8"	15,88	9,53	13,84	10,16	5,08	39,90	44,00	15,09	18,11	1,40	44,4	1,92
12 A- 2	60-2	3/4"	19,05	12,70	17,75	11,91	5,94	49,80	54,40	18,08	22,78	2,12	63,6	2,90
16 A- 2	80-2	1"	25,40	15,88	22,61	15,88	7,92	62,70	68,10	24,13	29,29	3,58	113,4	5,01
20 A- 2	100-2	1 1/4"	31,75	19,05	27,40	19,05	9,53	77,00	83,10	30,18	35,76	5,24	177,0	7,31
24 A- 2	120-2	1 1/2"	38,10	25,40	37,00	22,23	11,10	96,30	102,90	36,20	45,44	7,88	254,0	10,9
28 A- 2	140-2	1 3/4"	44,45	25,40	37,00	25,40	12,70	103,60	111,00	42,24	48,87	9,44	344,8	14,4
32 A- 2	160-2	2"	50,80	31,75	45,00	28,58	14,27	124,20	132,10	48,26	58,55	13,00	453,6	19,1
40 A- 2	200-2	2 1/2"	63,50	38,10	54,70	39,68	19,84	151,90	162,10	60,33	71,55	21,80	707,6	32,0
48 A- 2	240-2	3"	76,20	47,35	67,50	47,63	23,80	183,40	193,90	72,39	87,83	32,20	1020,6	44,0

● pouzdrový řetěz