




Figur 1F




Figur 2



Figur 2F



Figur 3F




Figur 5F

Typ PC 14M - Pro řemeny PC GT a CTD Synchrochain 14M / For belts PC GT and CTD Synchrochain 14M

Zubů Teeth	Šíř.ř. Width	Označení / Obj.č. Part.No.	Typ Fig.	* Mat. Mat.	Pouzdro Bush	Max.díra Max.Bore	Dp [mm]	De [mm]	Df [mm]	Dm [mm]	Di [mm]	F [mm]	S [mm]	R [mm]	m [kg]
28	20	28S-14M-20 2012	3F	GG	2012	50,0	124,78	121,98	141,0	-	-	33,0	32,0	1,0	2,46
37	37	28S-14M-37 2012	5F	GG	2012	50,0	124,78	121,98	141,0	-	88,0	51,0	32,0	19,0	2,97
30	20	30S-14M-20 2012	3F	GG	2012	50,0	133,69	130,89	141,0	-	-	33,0	32,0	1,0	2,85
37	37	30S-14M-37 2517	6F	GG	2517	60,0	133,69	130,89	141,0	-	98,0	51,0	45,0	3,0	3,81
32	20	32S-14M-20 2012	3F	GG	2012	50,0	142,60	139,80	155,0	-	-	33,0	32,0	1,0	3,26
27	27	32S-14M-27 2517	6F	GG	2517	60,0	142,60	139,80	155,0	-	100,0	51,0	45,0	3,0	4,53
34	20	34S-14M-20 2517	2F	GG	2517	60,0	151,52	148,72	162,0	117,0	-	33,0	45,0	-	4,35
37	37	34S-14M-37 2517	6F	GG	2517	60,0	151,52	148,72	162,0	-	109,0	51,0	45,0	3,0	5,06
68	68	34S-14M-68 PB40	1F	GG	PB40	100,0	151,52	148,72	162,0	134,0	-	84,0	104,0	-	6,25
36	20	36S-14M-20 2517	2F	GG	2517	60,0	160,43	157,53	168,0	117,0	-	33,0	45,0	-	5,05
37	37	36S-14M-37 2517	5F	GG	2517	60,0	160,43	157,53	168,0	-	117,0	51,0	45,0	6,0	5,92
68	68	36S-14M-68 PB40	1F	GG	PB40	110,0	160,43	157,53	168,0	134,0	-	84,0	104,0	-	6,68
90	90	36S-14M-90 PB50	1F	GG	PB50	110,0	160,43	157,53	168,0	131,0	-	106,0	136,0	-	8,18
38	20	38S-14M-20 2517	2F	GG	2517	60,0	169,34	166,54	183,0	117,0	-	33,0	45,0	-	5,39
37	37	38S-14M-37 2517	5F	GG	2517	60,0	169,34	166,54	183,0	-	126,0	51,0	45,0	6,0	6,51
68	68	38S-14M-68 PB40	1F	GG	PB40	115,0	169,34	166,54	183,0	141,0	-	84,0	104,0	-	7,46
90	90	38S-14M-90 PB50	1F	GG	PB50	115,0	169,34	166,54	183,0	147,0	-	106,0	136,0	-	9,73
125	125	38S-14M-125 PB50	1F	GG	PB50	115,0	169,34	166,54	183,0	147,0	-	141,0	161,0	-	11,74
40	20	40S-14M-20 2517	2F	GG	2517	60,0	178,25	175,45	197,0	117,0	-	33,0	45,0	-	5,97
37	37	40S-14M-37 2517	5F	GG	2517	60,0	178,25	175,45	197,0	-	135,0	51,0	45,0	6,0	7,31
68	68	40S-14M-68 PB40	1F	GG	PB40	125,0	178,25	175,45	197,0	156,0	-	84,0	104,0	-	7,81
90	90	40S-14M-90 PB50	1F	GG	PB50	125,0	178,25	175,45	197,0	156,0	-	106,0	136,0	-	10,29
125	125	40S-14M-125 PB50	1F	GG	PB50	125,0	178,25	175,45	197,0	156,0	-	141,0	161,0	-	12,23
44	20	44S-14M-20 3020	2F	GG	3020	75,0	196,08	193,28	211,0	144,0	-	33,0	51,0	-	8,03
37	37	44S-14M-37 3020	3F	GG	3020	75,0	196,08	193,28	211,0	-	-	51,0	51,0	-	9,44
68	68	44S-14M-68 3020	6F	GG	3020	75,0	196,08	193,28	211,0	-	153,0	84,0	51,0	16,5	11,54
90	90	44S-14M-90 PB50	1F	GG	PB50	140,0	196,08	193,28	211,0	169,0	-	106,0	136,0	-	11,92
125	125	44S-14M-125 PB50	1F	GG	PB50	140,0	196,08	193,28	211,0	170,0	-	141,0	161,0	-	14,46
48	20	48S-14M-20 3020	2F	GG	3020	75,0	213,90	211,11	226,0	144,0	-	33,0	51,0	-	9,48
37	37	48S-14M-37 3020	3F	GG	3020	75,0	213,90	211,11	226,0	-	-	51,0	51,0	-	11,44
68	68	48S-14M-68 3020	5F	GG	3020	75,0	213,90	211,11	226,0	-	171,0	84,0	51,0	33,0	13,74
90	90	48S-14M-90 3525	6F	GG	3525	100,0	213,90	211,11	226,0	-	171,0	106,0	66,0	20,0	16,76
125	125	48S-14M-125 PB50	1F	GG	PB50	160,0	213,90	211,11	226,0	185,0	-	141,0	161,0	-	14,70
50	20	50S-14M-20 3020	2F	GG	3020	75,0	222,82	220,02	239,0	144,0	-	33,0	51,0	-	10,13
37	37	50S-14M-37 3020	3F	GG	3020	75,0	222,82	220,02	239,0	-	-	51,0	51,0	-	12,62
68	68	50S-14M-68 3525	6F	GG	3525	100,0	222,82	220,02	239,0	-	180,0	84,0	65,0	9,5	16,63
90	90	50S-14M-90 3525	6F	GG	3525	100,0	222,82	220,02	239,0	-	180,0	106,0	66,0	20,0	18,38
125	125	50S-14M-125 3525	6F	GG	3525	100,0	222,82	220,02	239,0	-	180,0	141,0	65,0	38,0	20,93
56	20	56S-14M-20 3020	9F	GG	3020	75,0	249,55	246,76	267,0	144,0	207,0	33,0	51,0	9,0	10,81
37	37	56S-14M-37 3020	7F	GG	3020	75,0	249,55	246,76	267,0	144,0	207,0	51,0	51,0	0,0	12,70
68	68	56S-14M-68 3525	6F	GG	3525	100,0	249,55	246,76	267,0	-	207,0	84,0	65,0	9,5	21,15
90	90	56S-14M-90 3525	6F	GG	3525	100,0	249,55	246,76	267,0	-	207,0	106,0	66,0	20,0	23,46
125	125	56S-14M-125 3525	6F	GG	3525	100,0	249,55	246,76	267,0	-	207,0	141,0	65,0	38,0	25,91

* Materiál: ST = ocel, GG = litina / ST = steel, GG = iron cast

PB.. = s předvrtanou dírou d=.. / PB = Min.plain bore

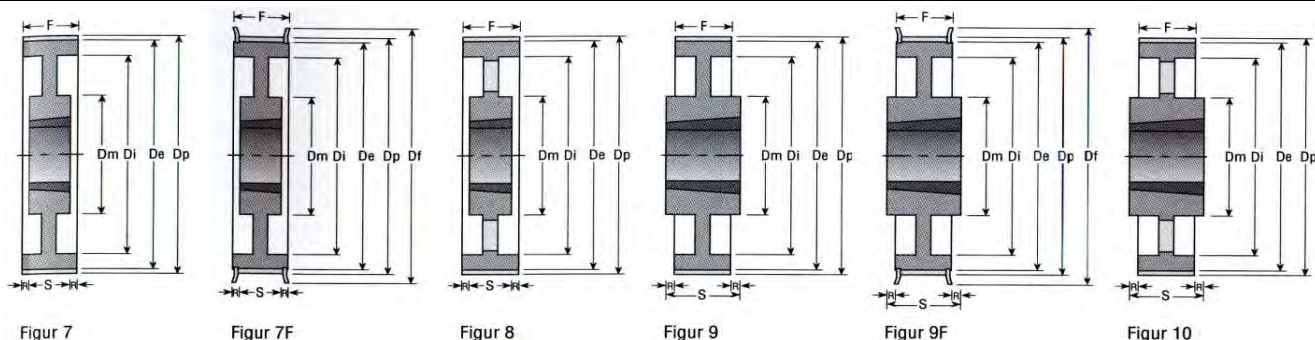

Typ PC 14M - Pro řemeny PC GT a CTD Synchrochain 14M / For belts PC GT and CTD Synchrochain 14M

Zubů Teeth	Šíř.ř. Width	Označení / Obj.č. Part.No.	Typ Fig.	* Mat. Mat.	Pouzdro Bush	Max.díra Max.Bore	Dp [mm]	De [mm]	Df [mm]	Dm [mm]	Di [mm]	F [mm]	S [mm]	R [mm]	m [kg]
60	20	60S-14M-20 3020	9	GG	3020	75,0	267,38	264,58	-	159,0	224,0	33,0	51,0	9,0	12,59
37	37	60S-14M-37 3020	7	GG	3020	75,0	267,38	264,58	-	159,0	224,0	51,0	51,0	0,0	14,23
68	68	60S-14M-68 3525	6	GG	3525	100,0	267,38	264,58	-	-	224,0	84,0	65,0	9,5	24,28
90	90	60S-14M-90 3525	6	GG	3525	100,0	267,38	264,58	-	-	224,0	106,0	66,0	20,0	26,53
125	125	60S-14M-125 4030	6	GG	4030	115,0	267,38	264,58	-	-	224,0	141,0	76,0	32,5	30,92
64	20	64S-14M-20 3020	9	GG	3020	75,0	285,21	282,41	-	159,0	242,0	33,0	51,0	9,0	13,84
37	37	64S-14M-37 3020	7	GG	3020	75,0	285,21	282,41	-	159,0	242,0	51,0	51,0	0,0	15,58
68	68	64S-14M-68 3525	6	GG	3525	100,0	285,21	282,41	-	-	242,0	84,0	65,0	9,5	27,86
90	90	64S-14M-90 3525	6	GG	3525	100,0	285,21	282,41	-	-	242,0	106,0	66,0	20,0	30,30
125	125	64S-14M-125 4030	6	GG	4030	115,0	285,21	282,41	-	-	242,0	141,0	76,0	32,5	35,34
72	20	72S-14M-20 3020	9	GG	3020	75,0	320,86	318,06	-	159,0	278,0	33,0	51,0	9,0	15,51
37	37	72S-14M-37 3020	7	GG	3020	75,0	320,86	318,06	-	159,0	278,0	51,0	51,0	0,0	17,24
68	68	72S-14M-68 3525	7	GG	3525	100,0	320,86	318,06	-	178,0	278,0	84,0	65,0	9,5	25,74
90	90	72S-14M-90 3525	7	GG	3525	100,0	320,86	318,06	-	178,0	278,0	106,0	66,0	20,0	26,36
125	125	72S-14M-125 4030	7	GG	4030	115,0	320,86	318,06	-	215,0	278,0	141,0	76,0	32,5	37,71
80	20	80S-14M-20 3020	9	GG	3020	75,0	356,51	353,71	-	159,0	314,0	33,0	51,0	9,0	18,13
37	37	80S-14M-37 3020	7	GG	3020	75,0	356,51	353,71	-	159,0	314,0	51,0	51,0	0,0	20,32
68	68	80S-14M-68 3525	7	GG	3525	100,0	356,51	353,71	-	178,0	314,0	84,0	65,0	9,5	29,86
90	90	80S-14M-90 4030	7	GG	4030	115,0	356,51	353,71	-	215,0	314,0	106,0	76,0	15,0	35,61
125	125	80S-14M-125 4030	7	GG	4030	115,0	356,51	353,71	-	215,0	314,0	141,0	76,0	32,5	42,02
90	20	90S-14M-20 3020	10	GG	3020	75,0	401,07	398,27	-	159,0	360,0	33,0	51,0	9,0	19,47
37	37	90S-14M-37 3020	8	GG	3020	75,0	401,07	398,27	-	159,0	360,0	51,0	51,0	0,0	29,85
68	68	90S-14M-68 3525	8	GG	3525	100,0	401,07	398,27	-	178,0	360,0	84,0	65,0	9,5	31,24
90	90	90S-14M-90 4030	7	GG	4030	115,0	401,07	398,27	-	215,0	360,0	106,0	76,0	15,0	41,90
125	125	90S-14M-125 4030	7	GG	4030	115,0	401,07	398,27	-	215,0	360,0	141,0	76,0	32,5	51,29
112	20	112S-14M-20 3020	10	GG	3020	75,0	499,11	496,31	-	159,0	456,0	33,0	51,0	9,0	24,25
37	37	112S-14M-37 3020	8	GG	3020	75,0	499,11	496,31	-	159,0	456,0	51,0	51,0	0,0	27,43
68	68	112S-14M-68 3525	8	GG	3525	100,0	499,11	496,31	-	178,0	456,0	84,0	65,0	9,5	39,25
90	90	112S-14M-90 4535	8	GG	4535	125,0	499,11	496,31	-	215,0	456,0	106,0	90,0	8,0	70,89
125	125	112S-14M-125 4535	8	GG	4535	125,0	499,11	496,31	-	215,0	581,0	141,0	89,0	26,0	65,64
140	20	140S-14M-20 3020	10	GG	3020	75,0	623,89	621,09	-	159,0	581,0	33,0	51,0	9,0	20,96
37	37	140S-14M-37 3525	10	GG	3525	100,0	623,89	621,09	-	206,0	581,0	51,0	65,0	7,0	33,55
68	68	140S-14M-68 3525	8	GG	3525	100,0	623,89	621,09	-	206,0	581,0	84,0	65,0	9,5	40,87
90	90	140S-14M-90 4535	8	GG	4535	125,0	623,89	621,09	-	215,0	581,0	106,0	90,0	8,0	74,56
125	125	140S-14M-125 4535	8	GG	4535	125,0	623,89	621,09	-	215,0	581,0	141,0	89,0	26,0	67,90
168	37	168S-14M-37 3525	10	GG	3525	100,0	748,66	745,87	-	206,0	706,0	51,0	65,0	7,0	64,50
68	68	168S-14M-68 3525	8	GG	3525	100,0	748,66	745,87	-	206,0	706,0	84,0	65,0	9,5	73,30
90	90	168S-14M-90 5040	8	GG	5040	130,0	748,66	745,87	-	267,0	708,0	106,0	102,0	2,0	109,24
125	125	168S-14M-125 5040	8	GG	5040	125,0	748,66	745,87	-	267,0	706,0	141,0	102,0	19,5	120,66
192	37	192S-14M-37 4030	10	GG	4030	115,0	855,61	852,82	-	215,0	812,0	51,0	76,0	12,5	83,82
68	68	192S-14M-68 4030	8	GG	4030	115,0	855,61	852,82	-	215,0	812,0	84,0	76,0	4,0	94,21
90	90	192S-14M-90 5040	8	GG	5040	130,0	855,61	852,82	-	267,0	812,0	106,0	102,0	2,0	126,05
125	125	192S-14M-125 5040	8	GG	5040	125,0	855,61	852,82	-	267,0	812,0	141,0	102,0	19,5	142,39

* Materiál: ST = ocel, GG = litina / ST = steel, GG = iron cast