


Úhel záběru / Pressure angle 20°

Material / Material: ocel C45 / steel C45

### Ozubené hřebeny / Spurgear racks suitable for continous mounting

M Modul Module	hp [mm]	he x S [mm]	L							
			500		1000		2000		3000	
			Ozn./Part.N.	[kg]	Ozn./Part.N.	[kg]	Ozn./Part.N.	[kg]	Ozn./Part.N.	[kg]
1	14,00	15 x 15	M1x15x0500	0,82	M1x15x1000	1,5	M1x15x2000	3,1	M1x15x3000	4,9
1,5	15,50	17 x 17	M1,5x17x0500	1,0	M1,5x17x1000	2,0	M1,5x17x2000	4,0	M1,5x17x3000	6,1
2	18,00	20 x 20	M2x20x0500	1,4	M2x20x1000	2,7	M2x20x2000	5,4	M2x20x3000	8,4
2,5	22,50	25 x 25	M2,5x25x0500	2,1	M2,5x25x1000	4,3	M2,5x25x2000	8,6	M2,5x25x3000	11,9
3	27,00	30 x 30	M3x30x0500	3,1	M3x30x1000	6,3	M3x30x2000	12,5	M3x30x3000	18,6
4	18,00	22 x 22	M4x22x0500	1,4	M4x22x1000	3,25	M4x22x2000	6,8	-	-
4	21,00	25 x 25	M4x25x0500	1,8	M4x25x1000	3,65	M4x25x2000	7,3	M4x25x3000	10,9
4	26,00	30 x 30	M4x30x0500	3,05	M4x30x1000	6,0	M4x30x2000	11,9	M4x30x3000	18,1
4	36,00	40 x 40	M4x40x0500	5,5	M4x40x1000	11,1	M4x40x2000	22,0	M4x40x3000	31,3
5	45,00	50 x 50	M5x50x0500	8,3	M5x50x1000	17,5	M5x50x2000	34,6	M5x50x3000	45,3
6	54,00	60 x 60	M6x60x0500	12,65	M6x60x1000	25,0	M6x60x2000	51,0	-	-
8	72,00	80 x 80	M8x80x0500	22,4	M8x80x1000	45,0	M8x80x2000	90,0	-	-

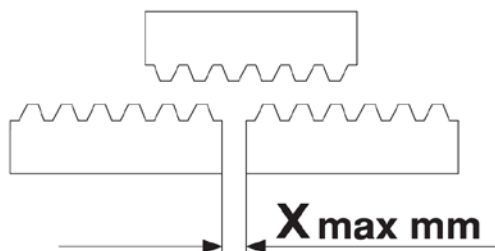

### Technická data / Technical specifications

M Modul Module	Rozteč Pitch [mm]	X [mm]	L							
			500		1000		2000		3000	
			Lr	Z	Lr	Z	Lr	Z	Lr	Z
1	3,14	0,5	499,51	159	1002,17	319	2001,20	637	3000,23	955
1,5	4,71	0,6	499,51	106	1003,74	213	2002,77	425	3001,80	637
2	6,28	0,6	502,66	80	1005,31	160	2004,34	319	3003,37	478
2,5	7,85	0,7	502,66	64	1005,31	128	2002,77	255	3000,23	382
3	9,42	0,8	499,51	53	1008,45	107	2007,48	213	3006,51	319
4	12,57	0,8	502,66	40	1005,31	80	2010,62	160	3003,37	239
5	15,71	1,0	502,66	32	1005,31	64	2010,62	128	3000,23	191
6	18,85	1,0	508,94	27	1017,88	54	2016,91	107	-	-
8	25,13	1,0	502,66	20	1005,31	40	2010,62	80	-	-